
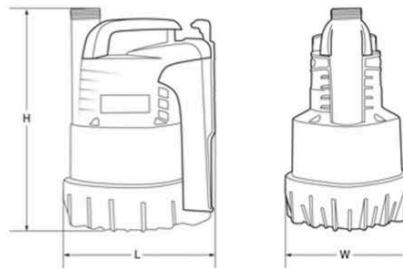


Prosub C6/C9 Drainage Clear Water

- COMPACT • INTEGRATED FLOAT SWITCH • PLUG AND PLAY • DESIGNED IN ITALY

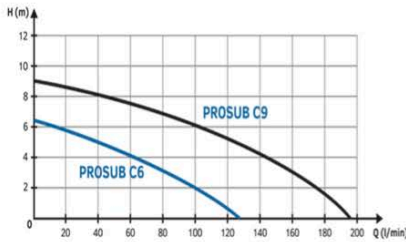

	Model	PROSUB C6	PROSUB C9
Electrical data	P2 Power consumption [W]	170	250
	Voltage [V]	1 ~ 220-240 AC	1 ~ 220-240 AC
	Frequency [Hz]	50	50
	Current [A]	1.3	2.5
	Capacitor nF	8	10
	Capacitor Vc	450	450
Hydraulic data	Flow rate max. [l/min]	125	195
	Max. Head [m]	6.5	9
	Max. Immersion depth [m]	7	7
	Low suction capability/automatic mode [mm]	45	45
	Low suction capability/manual mode [mm]	2-3	2-3
Range of use/materials	Length of Power Cable [m]	10	10
	Cable	H05 RNF	H05 RNF
	Pump International protection	IP X 8	IP X 8
	Insulation Class	F	F
	Liquid range Temperature [°C]	0 °C / +35 °C	0 °C / +35 °C
	Dimension of particles [mm]	5	5
Dimensions / weight	L x W x H [mm]	230 x 230 x 426	230 x 230 x 426
	DNM GAS	1" 1/4 M	1" 1/4 M
	Box Dimensions l x w x h [cm]	25 x 25 x 44.6	25 x 25 x 44.6
	Net/Gross Weight [kg]	3.5 / 4.5	3.5 / 4.5
	Quantity for pallet [no.]	60+40	60+40